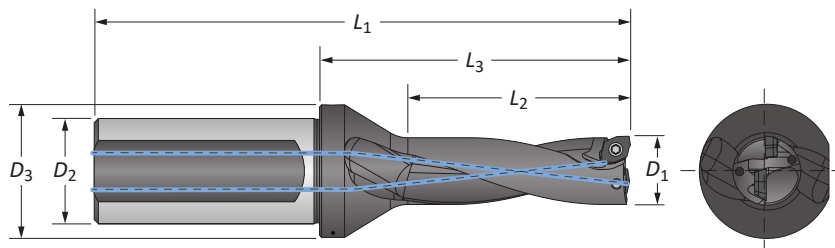




Držáky 4TEX | Metrická stopka

Série 06 | Rozsah průměrů: 18.50 mm - 21.99 mm (0.728" - 0.866")


Metrická stopka

Délka	D ₁		Tělo nástroje			Stopka		Max Offset	Obj. číslo
	mm	in	L ₂	L ₃	L ₁	D ₂	D ₃		
2xD	18.50	0.728	37.00	58.40	112.40	25.00	32.00	0.90	D2061850M-25FM
	19.00	0.748	38.00	59.40	113.40	25.00	32.00	0.80	D2061900M-25FM
	19.05	0.750	38.10	59.40	113.40	25.00	32.00	0.80	D2060750I-25FM
	19.43	0.765	38.86	59.41	113.41	25.00	32.00	0.70	D2060765I-25FM
	19.50	0.768	39.00	60.40	114.40	25.00	32.00	0.70	D2061950M-25FM
	20.00	0.787	40.00	61.40	115.40	25.00	32.00	0.50	D2062000M-25FM
	20.50	0.807	41.00	62.40	116.40	25.00	32.00	0.40	D2062050M-25FM
	20.64	0.813	41.25	62.40	116.40	25.00	32.00	0.40	D2060812I-25FM
	21.00	0.827	42.00	63.40	117.40	25.00	32.00	0.30	D2062100M-25FM
3xD	21.50	0.846	43.00	64.40	118.40	25.00	32.00	0.20	D2062150M-25FM
	18.50	0.728	55.00	76.90	130.90	25.00	32.00	0.90	D3061850M-25FM
	19.00	0.748	57.00	78.40	132.40	25.00	32.00	0.80	D3061900M-25FM
	19.05	0.750	57.15	78.40	132.40	25.00	32.00	0.80	D3060750I-25FM
	19.43	0.765	58.29	78.41	132.41	25.00	32.00	0.70	D3060765I-25FM
	19.50	0.768	58.50	79.90	133.90	25.00	32.00	0.70	D3061950M-25FM
	20.00	0.787	60.00	81.40	135.40	25.00	32.00	0.50	D3062000M-25FM
	20.50	0.807	61.50	82.90	136.90	25.00	32.00	0.40	D3062050M-25FM
	20.64	0.813	61.87	82.90	136.90	25.00	32.00	0.40	D3060812I-25FM
4xD	21.00	0.827	63.00	84.40	138.40	25.00	32.00	0.30	D3062100M-25FM
	21.50	0.846	64.50	85.90	139.90	25.00	32.00	0.20	D3062150M-25FM
	18.50	0.728	74.00	95.40	149.40	25.00	32.00	0.90	D4061850M-25FM
	19.00	0.748	76.00	97.40	151.40	25.00	32.00	0.80	D4061900M-25FM
	19.05	0.750	76.20	97.40	151.40	25.00	32.00	0.80	D4060750I-25FM
	19.43	0.765	77.72	97.41	151.41	25.00	32.00	0.70	D4060765I-25FM
	19.50	0.768	78.00	99.40	153.40	25.00	32.00	0.70	D4061950M-25FM
	20.00	0.787	80.00	101.40	155.40	25.00	32.00	0.50	D4062000M-25FM
	20.50	0.807	82.00	103.40	157.40	25.00	32.00	0.40	D4062050M-25FM
20.64	0.813	82.49	103.40	157.40	25.00	32.00	0.40	D4060812I-25FM	
21.00	0.827	84.00	105.40	159.40	25.00	32.00	0.30	D4062100M-25FM	
21.50	0.846	86.00	107.40	161.40	25.00	32.00	0.20	D4062150M-25FM	

Destičky

ISO Materiály	Obj. číslo	 Šroub pro destičku	 Šroubovák Torx®	Přípustný utahovací moment
P	4T-06T204-P	72251-T7-1	8T-7	0.8 N-cm (7.1 in-lbs)
S M	4T-06T204-M			
H	4T-06T204-H			
K	4T-06T204-K			
N	4T-06T204-N			



Tolerance otvorů

Délka	mm	in
2xD	-0.10 / +0.20	-0.004 / +0.008
3xD	-0.10 / +0.20	-0.004 / +0.008
4xD	-0.10 / +0.25	-0.004 / +0.010

A55: 32 - 33

A55: 29 - 31

A55: 28



Klíč na str. A55: 1

m = Metrické (mm)

i = Palcové (mm)

Destičky se dodávají po 10 ks

Šroubky se dodávají po 10 ks